



## Installation of SW300-2 Signal Switch

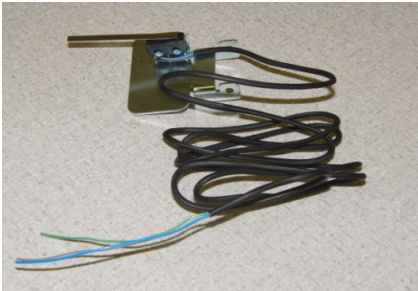

### Step 1:

- 1.1: Remove hinge stile push bar end cap (Part #50)
- 1.2: Slide Push Bar off of axle brackets, being careful to catch axle pins.

1.1

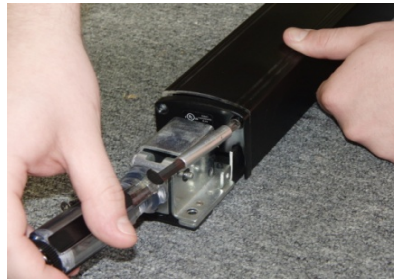

### Step 2

- 2.1: Remove axle pin from the hinge stile axle bracket.
- 2.2: Insert SW300-2 Signal Switch between ears of rear axle bracket with switch trigger pointing down toward the bottom of channel and reinstall axle pin.

2.2




*Assembly with SW300-2 installed.*

2.3

2.3: Bend trigger so that it is in contact with the bottom of channel but without triggering switch.

2.4: Lay out switch wire over the top of the hinge stile axle bracket and out the back of the device.

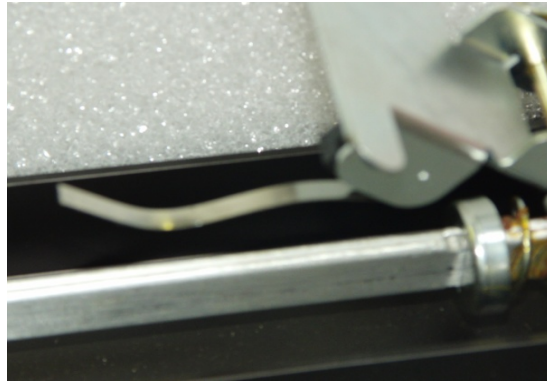


### Step 3

3.1: Grease ends of axle pins.

3.2: Starting with the hinge stile side, slide push bar back onto axle pins.

3.3: Re-attach Hinge Stile Push Bar End Cap.

3.2

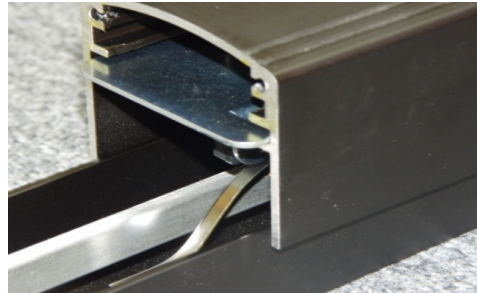

### Step 4

4.1: Make wire connections :

*Green: Common*

*Grey: Normally Closed*

*Blue: Normally Open*